

 KIMBER KABLE


SUMMIT SERIES



D60

DIGITAL CABLE

Precision 75Ω pure silver digital Tri-axial. S/PDIF.

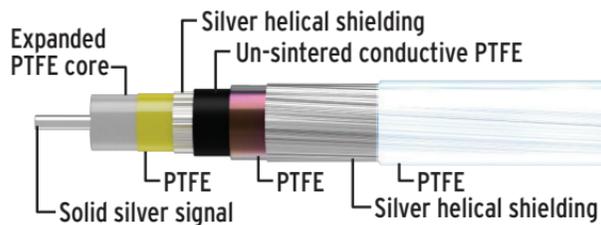



Silver solid core center conductor for maximum conductivity.



Dual layer pure silver shielding with 100% coverage.



An intermediate layer of un-sintered semi-conductive PTFE prevents triboelectric noise from reaching the signal path. This noise is the result of mechanical vibration which can contaminate the digital signal.



VELOCITY OF PROPAGATION: A air articulated PTFE core results in propagation velocity of 85% for vanishing low delay, essential for ultra responsive digital signal transmission. The D60 is truly a design to PUSH EVERY BIT.



Tightly controlled 75Ω impedance.



Nitrogen assisted hand soldered termination.



2752 South 1900 West, Ogden, Utah 84401 USA
www.kimber.com - 801-621-5530



v082020