



D-60

PUSH EVERY BIT

PTFE dielectric and pure silver are the only ingredients in this flagship model. A digital cable by which all others are measured. Super low noise floor and incredible bandwidth deliver a huge soundstage with the natural rhythm and pacing of real instruments. A digital cable should disappear and D-60 meets the challenge.

2 helically wound shields

Low loss PTFE dielectric


Silver conductors

D-60

DIGITAL INTERCONNECTS



0.2125"
(5.9375mm)




2 helically wound shields

Solid silver center conductor

Nitrogen assisted hand soldered termination

Low loss air articulated fluorocarbon dielectric

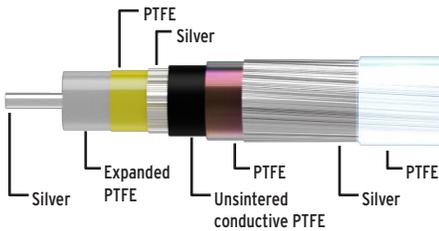

ELECTRICAL SPECIFICATIONS

DUT: D-60 1m terminated with Ultraplate RCA type connectors

(Cp) parallel capacitance:	55.20 pF
(Ls) series inductance:	0.502 μ H
(Rdc) dc loop resistance:	0.115 Ω

RECOMMENDED CONNECTOR OPTIONS:



WBT-0102 CU



BNC type



ULTRAPLATE D-60